


# INSTALLATION GUIDE

Doc ID: 199-4708001

Doc Rev: 040120

## INSTALLATION

1. Soak the friction disks in engine oil for 10-15 minutes. Pouring oil into the plastic bag suffices.

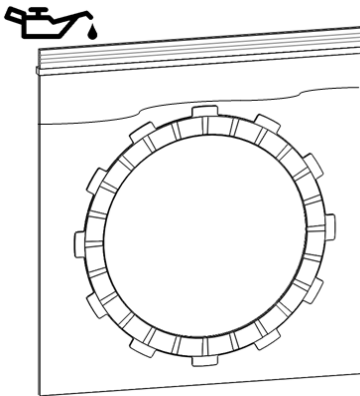

2. Remove your OEM clutch pack – Take note of the clutch pack configuration for reference
3. Install the Rekluse clutch pack as follows:  
Contents: 8 Friction Plates – 6 .048in Drive Plates – 1 .060 Drive Plate (Thick)
  - A. Install - Friction Disk
  - B. Install - .060in Drive Plate (Thick)
  - C. Install - Friction Disk
  - D. Install - .048in Drive Plate
  - E. Repeat step C and D to install the remaining clutch plates.
  - F. Last plate installed should be a Friction Disk
4. After installation, start the bike and warm it up for a few minutes.
5. Break the clutch in by performing 8-10 easy roll-on take-offs from a stop. Pump/Modulate the clutch lever while performing the roll-on take-offs.

