



INSTALLATION GUIDE

RadiusX for YFZ450
2014+ models

Doc ID: 191-6307080A
Revision: 102721

Table of Contents

OVERVIEW	3
INSTALLATION TIPS	3
TOOLS.....	3
INCLUDED PARTS	4
DISASSEMBLE CLUTCH.....	5
INSTALL THE CLUTCH PACK	5
INSTALL THE PRESSURE PLATE.....	8
CLUTCH COVER INSTALLATION.....	9
SET THE INSTALLED GAP	9
CHECK FREE PLAY GAIN	10
Learn how to check Free Play Gain	10
Two Ways to Check for Free Play Gain	12
The Rubber Band Method.....	12
The Hand Method.....	15
BREAK IN THE NEW CLUTCH.....	17
EXP TUNING OPTIONS	19
Changing the EXP springs	19
SHIFTING AND OPERATION.....	22
MAINTENANCE.....	22
Disk inspection examples.....	23
TROUBLESHOOTING	24
Clutch Drag	24
Clutch Slip	24
NEED ADDITIONAL HELP?.....	25


OVERVIEW

This kit replaces some of the OE (Original Equipment) or “stock” clutch parts. These parts are designed specifically for your motorcycle to ensure optimal performance. The following is a summary of what is replaced:

- OE friction disks
- OE drive plates
- OE Pressure plate springs

INSTALLATION TIPS


- Read the separate included Safety Information document before operating the vehicle with the product installed.
- This kit is compatible **ONLY** with the OE clutch components.
- Read this entire document before performing any steps.
- If you install this product for a customer or another person, instruct them to read the **Safety Information** document and the **Installation Guide** before operating the vehicle with the product.
- Protect eyes and skin – wear safety glasses and work gloves.
- Use the torque values listed in the instructions. Otherwise, use the torque specifications found in your OE service manual.

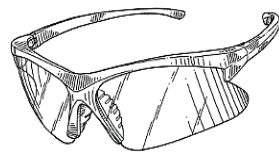

TOOLS

- 8 mm socket
- 10 mm socket
- End wrenches (Metric)
- 2 dental pick tools
- Torque wrench (in-lb & ft-lb, or N-m)

INCLUDED PARTS

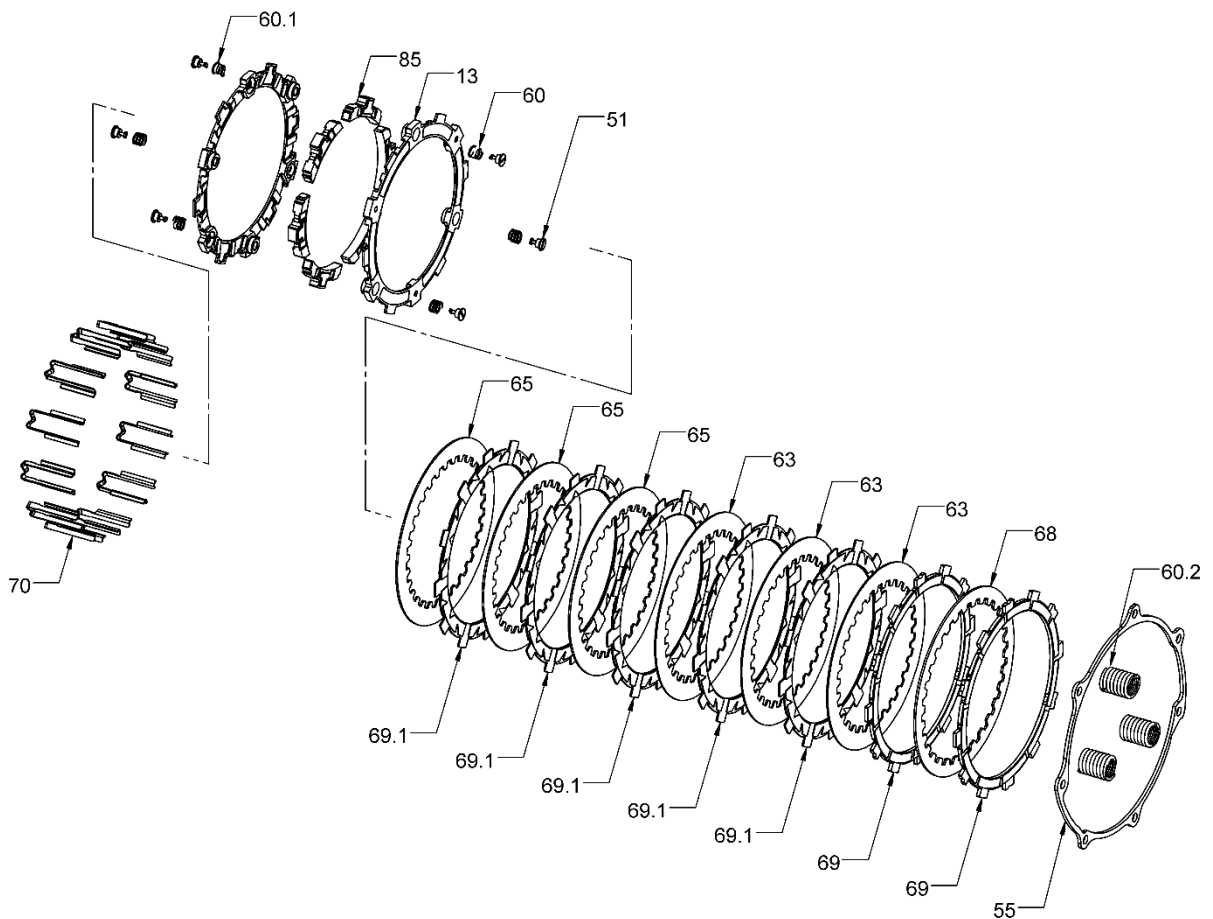


Item	Description	Qty.
13	EXP Bases	2
85	Wedge assembly	6
51	Quarter-turn pins (extra included)	6
60	EXP adjustment springs – colors vary	12
60.2	Pressure plate springs	3
63	Steel drive plate - .040" (1 mm)	3
65	Steel drive plate - .048" (1.2 mm)	3
68	Steel drive plate - .060" (1.5 mm)	1
69	TorqDrive [®] thick friction disks - .130" (3.30 mm)	2
69.1	TorqDrive [®] thin friction disks	5
70	Basket sleeves	12
Not shown	Orange Free Play Gain rubber band	1
55	Clutch cover gasket	1


Visit www.rekluse.com/support for a full parts fiche illustration and part numbers.

DISASSEMBLE CLUTCH

1. Soak the TorqDrive® friction disks in new oil for 5 minutes. Make sure the friction disks are coated on both sides.



2. Remove the following OE parts. *You may need to use dental pick tools to reach and remove the bottom plates.*

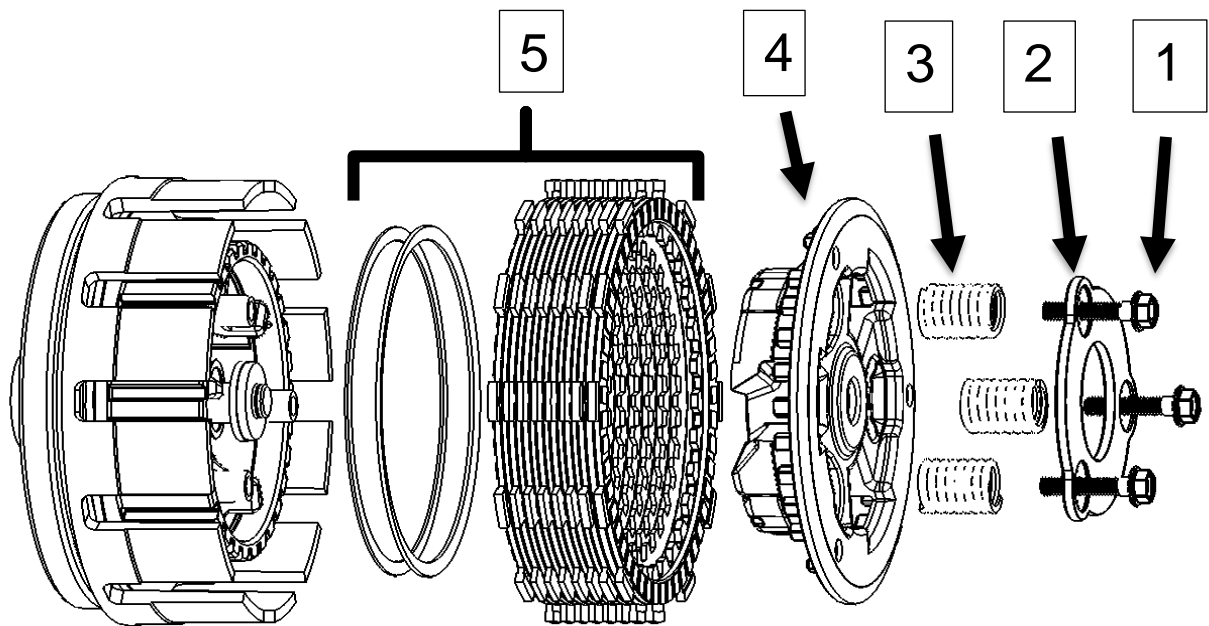

1	Pressure plate bolts
2	Spring hold-down ring
3	Pressure plate springs
4	Pressure plate
5	Clutch pack (including Judder Spring and Seat)

Note: Set the pressure plate bolts, spring ring, and pressure plate aside. They will be reused.

INSTALL THE CLUTCH PACK


1. Inspect the clutch basket for notching. Do not install sleeves or use product with a notched basket. Notched basket tang faces

⚠ WARNING

can cause the sleeves to break. Do not use baskets that have been filed, machined, or modified on the tangs. Replace basket if necessary.

Failure to inspect the basket and replace if necessary could result in death, serious injury, and/or property damage.

2. Install **ALL** the Rekluse basket sleeves into the basket slots. Make sure the sleeve tabs sit against the inside of the basket,

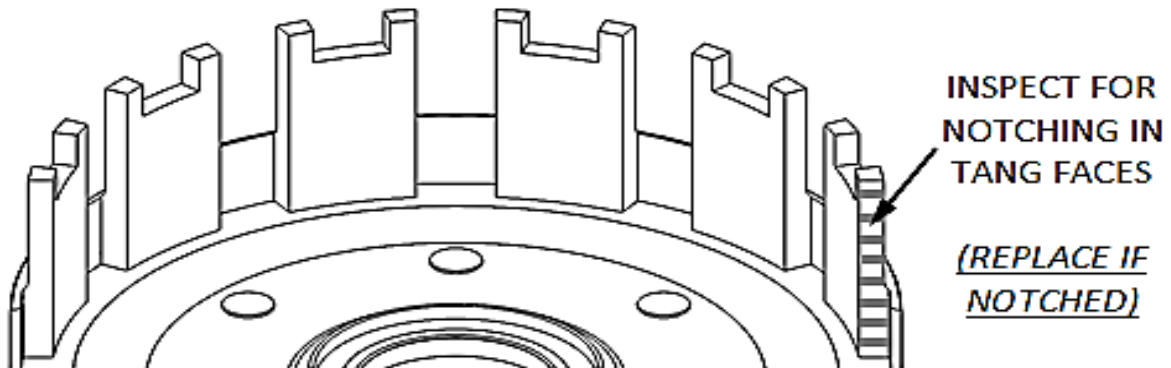


then push the sleeves down until they contact the bottom of the tang slot. See pictures for reference.

⚠ WARNING

Rekluse basket sleeves are designed to be installed into an OE or Rekluse clutch basket ONLY. The use of non-Rekluse aftermarket clutch baskets may cause clutch damage or failure.


Note: *When seated in the basket, the sleeves will stick slightly above or below flush with the top of the basket. This is normal.*

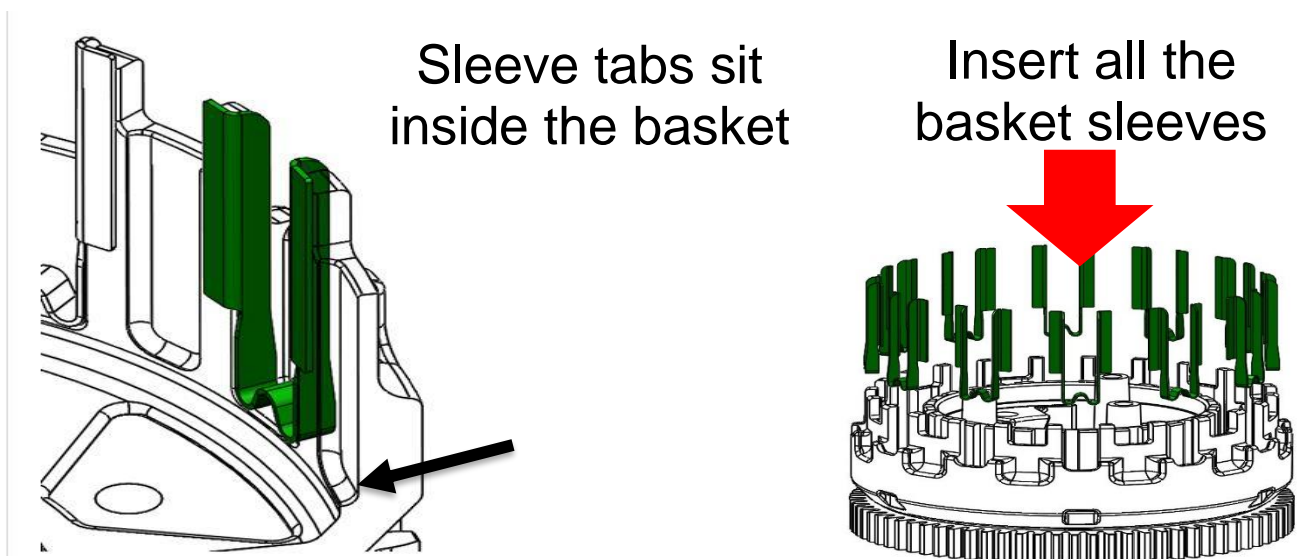


3. Install the Rekluse EXP disk into the clutch basket.

4. Install a .048" (1.2 mm) steel drive plate, then alternate 2 thin friction disks with 2 additional steel drive plates.

Note: Some friction disks are marked with a small colored dot. This mark is used for processing and can be ignored.

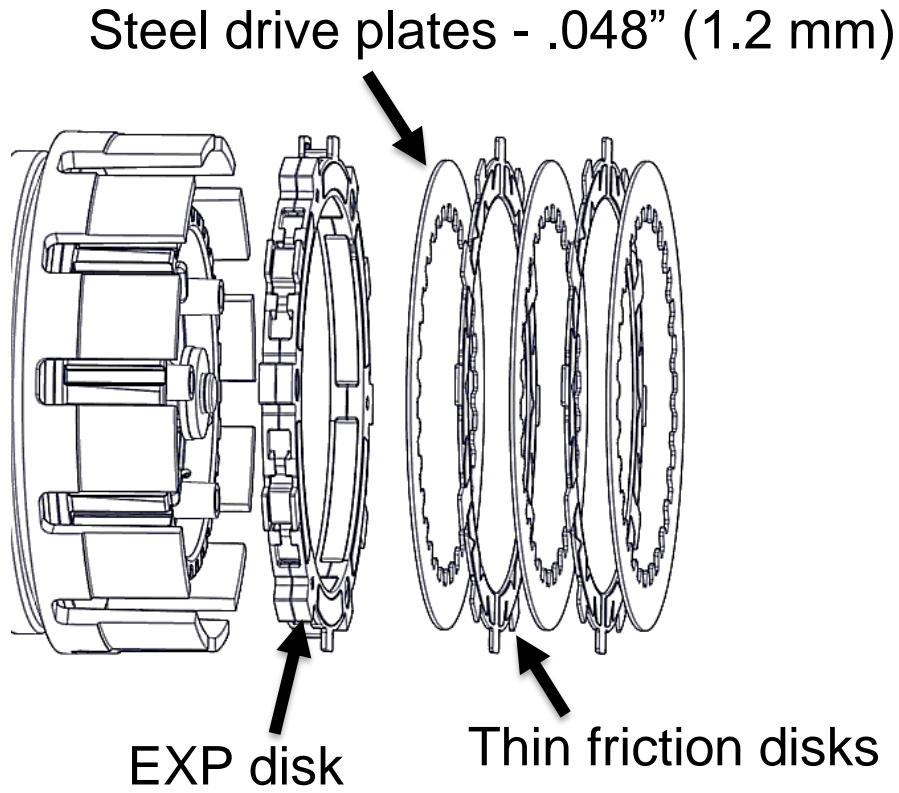


5. On top of the last steel drive plate, install a thin friction disk, then alternate 3 - .040" (1 mm) steel drive plates with the last 2 thin friction disks.

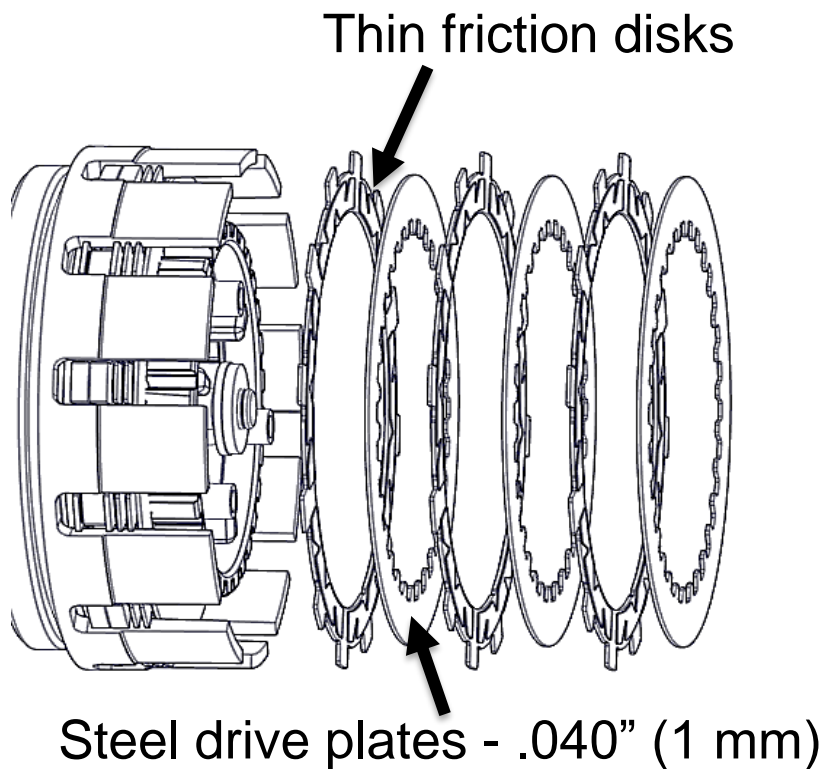


INSTALL THE PRESSURE PLATE

1. Turn the OE pressure plate upside down on a workbench, then install a .130" (3.30 mm) Rekluse thick friction disk onto the pressure plate.
2. Install the .060" (1.5 mm) thick steel drive plate on top of the friction disk, then install the remaining .130" (3.30 mm) Rekluse thick friction disk.

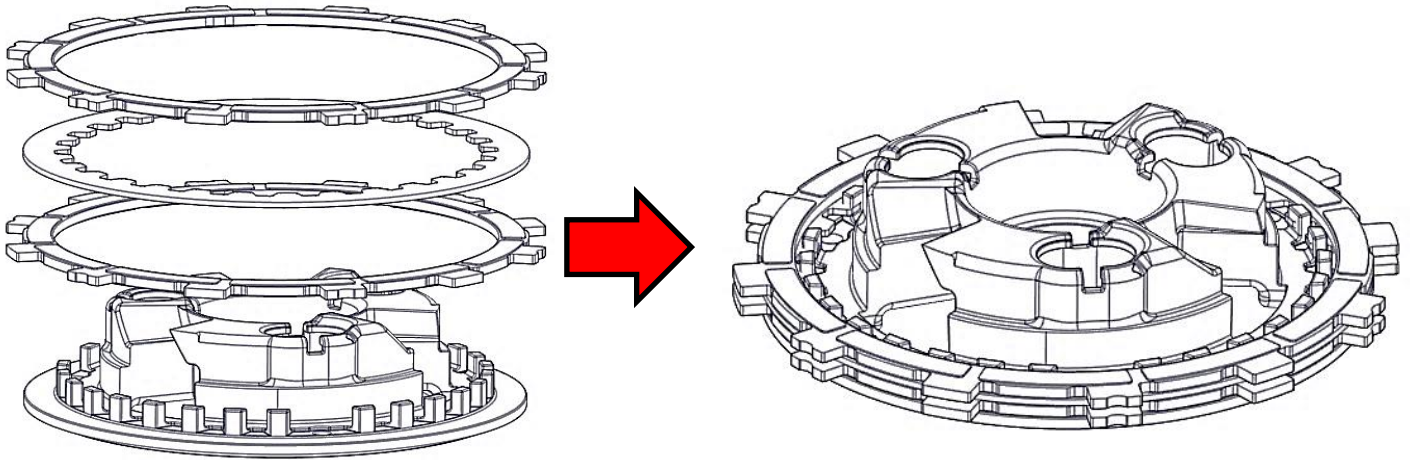

3. Turn the assembled pressure plate right side up, then install it onto the clutch pack.
4. Install the Rekluse pressure plate springs, then reinstall the OE spring ring and OE pressure plate bolts.

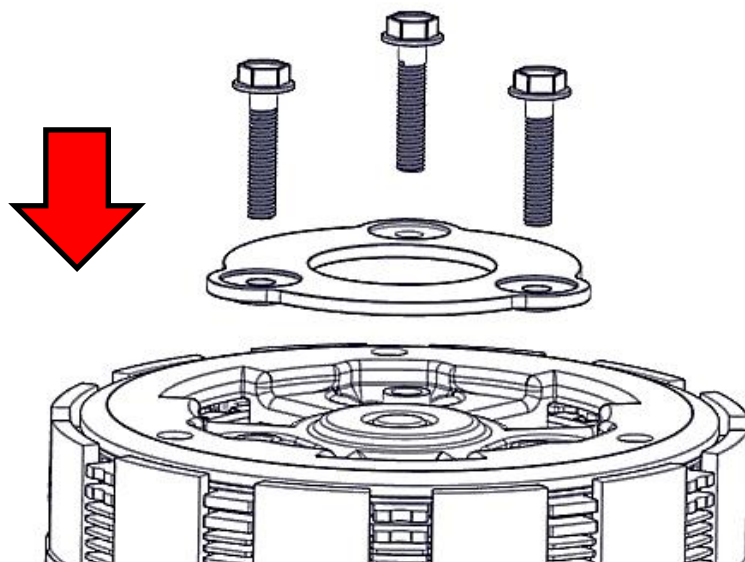

5. Using a 10 mm socket, torque the pressure plate bolts to **90 in-lb (10 N-m)**.

CLUTCH COVER INSTALLATION

1. Install the new Rekluse cover gasket onto the OE clutch cover.
2. Reinstall the OE clutch cover, then reinstall the clutch cover bolts.
3. Lightly tighten the bolts in a star pattern, then torque the bolts to OE specifications.

SET THE INSTALLED GAP

The “installed gap” is the separation in the clutch pack created by the tension adjusted into the clutch cable. This gap is what allows the clutch to spin freely until the desired RPM is reached for engagement. The installed gap must be set correctly for optimal performance.

1. Use a wrench to loosen the jam nut and completely collapse the in-line cable adjuster allowing for plenty of clutch cable and lever slack.
2. At the in-line cable adjuster, tighten the clutch cable tension to the point where there is no lever freeplay (the clutch lever is tight against its perch). At this point, there should be no cable slack. This is not your final setting. It is your **starting point** for setting the installed gap.
3. Expand the in-line cable adjuster housing 3-5 turns to lift pressure plate.
4. To set the final installed gap, check Free Play Gain. The directions are in the next section.

CHECK FREE PLAY GAIN

It is very important that you understand how to verify the correct installed gap by checking Free Play Gain. The installed gap is what allows the auto function of the product to perform properly.

Correct Free Play Gain = Correct installed gap

Setup, break-in, and rechecking the installed gap is CRUCIAL. Failure to properly maintain your installed gap can result in premature wear or failure of your clutch. Use the following steps to verify the installed gap by checking Free Play Gain.

⚠ WARNING

Failure to check and verify Free Play Gain can cause failure or damage to this product. Setting the correct installed gap is critical for clutch performance.

Learn how to check Free Play Gain

If you are familiar with checking Free Play Gain, check for Free Play Gain then skip to the “Adjust the Installed Gap” section.

If Free Play Gain is new to you, follow the instructions below to help you learn this important step. You can also view the video entitled “How to Check Free Play Gain” on our website at <https://rekluse.com/support/videos>.

Checking Free Play Gain allows you to externally monitor the installed gap so you can know when to make an adjustment if the installed gap is too large or too small.

The correct installed gap is verified by observing and feeling the increased free play movement in the clutch lever. This extra movement is called “Free Play Gain.”



Lever with "slack" removed

Lever position around 4,000 RPM

Free Play Gain

1/8"-1/4" (3 mm-6 mm) lever movement

- **If there is too much Free Play Gain**, the installed gap is too small.
 - The vehicle may drag and stall because it has difficulty disengaging the clutch. It may also be difficult to shift.
 - Too much Free Play Gain will not hurt the clutch, but it will negatively affect clutch performance.
- **With too little or no Free Play Gain**, the installed gap is too large.
 - This means when the EXP is fully expanded it does not lift the pressure plate. The clutch may slip and make the vehicle seem like it is losing power.

- The vehicle may not move forward even though the engine RPM increases as if the clutch lever is slightly pulled.
- Too little Free Play Gain will cause the clutch system to burn up.

Optimal Free Play Gain yields 1/8”-1/4” (3 mm-6 mm) of clutch lever movement, measured at the ball end of the lever. This measurement at the lever correlates to achieving the ideal installed gap.

Two Ways to Check for Free Play Gain

The following steps explain **2 ways** to check Free Play Gain. One way uses the rubber band Rekluse includes in the clutch kit, and one uses your hand. You can use either method to check for Free Play Gain.

Rekluse recommends that you begin with the rubber band method first to check for Free Play Gain and then learn the hand method. The rubber band will help you learn how to recognize Free Play Gain until you are comfortable with the hand method. Learning to check Free Play Gain by hand effectively and comfortably can make it easy to check Free Play Gain every time you ride.

The Rubber Band Method

Use the rubber band method for the initial set up. It can also be used before each ride until you feel comfortable checking the Free Play Gain using the hand method.

⚠ WARNING

BEFORE YOU BEGIN, verify that the vehicle is in NEUTRAL before checking Free Play Gain. Failure to do so may result in the vehicle lurching forward, and loss of control and/or injury may result.

A Rekluse auto-clutch can make your motorcycle appear to be in neutral when in gear, even when the engine is running and clutch lever released.

Motorcycles equipped with a Rekluse auto-clutch can move suddenly and unexpectedly and cause riders to lose control. To avoid death, serious injury, and/or property damage, always sit on the motorcycle to start it.

a) Before you begin, place the vehicle in **NEUTRAL**, start the engine and let it warm up for 2-3 minutes to idle down and warm the engine oil.


b) Stretch the included rubber band between your thumbs, then place the top end of the rubber band on the outer end of the left handlebar grip.



c) While holding the top end of the rubber band against the handlebar, stretch the band downward, then loop it through itself.



- d) Pull the band through the loop, then attach it to the outside end of the clutch lever. This will take up the initial free play (slack) and put the lever in a position to detect the Free Play Gain.

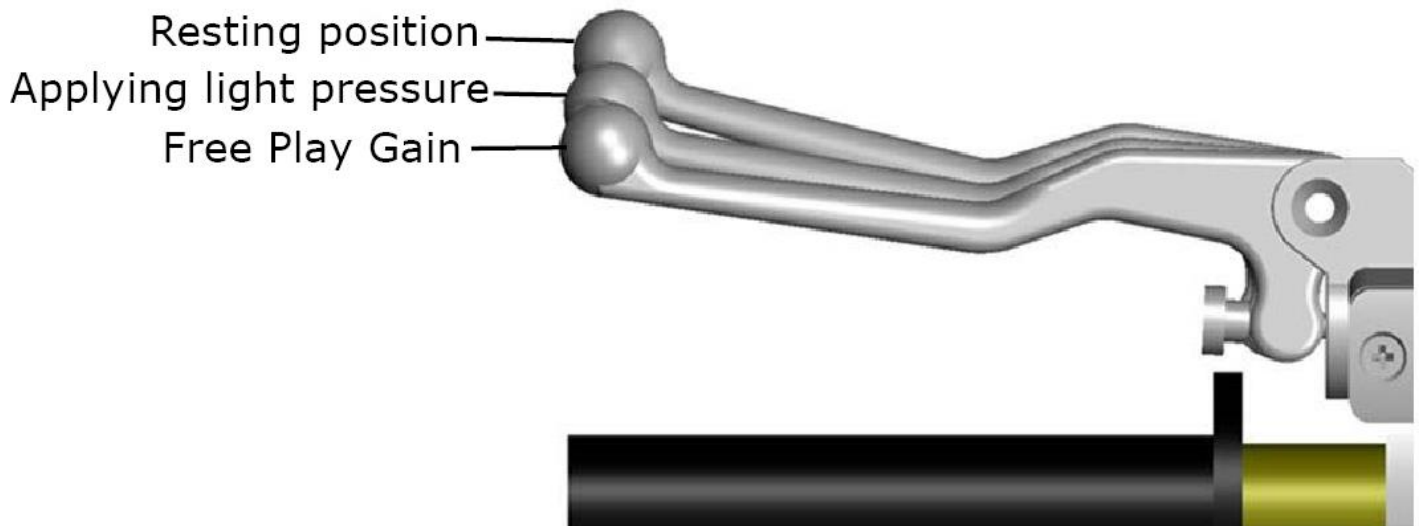

- e) While still in **NEUTRAL**, quickly rev the engine between 3,000-5,000 RPM (1/4 to 1/2 throttle), then let it return to idle. Notice the movement in the clutch lever when the engine is revved. This is your Free Play Gain.

Note: *It is very important the motor returns to idle before revving the engine again or Free Play Gain will not be correct.*

- f) When the vehicle returns to idle, rest your hand across the clutch lever. Rev the engine again to 3,000-5,000 RPM so you can observe the movement while feeling for Free Play Gain with your hand.

The Hand Method

Use the hand method to check Free Play Gain before the start of every ride for optimum performance and longevity of your new clutch.

- a) Before you begin, place the vehicle in **NEUTRAL**, start the engine and let it warm up for 2-3 minutes to idle down and warm up the engine oil.
- b) With the vehicle at idle, apply enough pressure to the clutch lever to take up the initial free play (slack) in the clutch lever.
- c) While still in **NEUTRAL**, continue to apply light pressure and quickly rev the engine between 3,000-5,000 RPM (1/4 to 1/2 throttle), then let it return to idle. Notice the movement in the clutch lever when the engine is revved. This is your Free Play Gain.
- d) When the vehicle returns to idle, rev the engine between 3,000-5,000 RPM a second time to verify the Free Play Gain again.

e) ADJUST THE INSTALLED GAP

After checking for Free Play Gain, you may need to adjust the installed gap. If Free Play Gain is optimal, continue to “SHIFTING AND OPERATION

Always use proper gear selection for the speed and situation whether accelerating or slowing down.

When accelerating from a stop it is best to start in 1st gear to prevent excessive slipping of the clutch. Starting in too tall a gear repeatedly will prematurely wear out the clutch resulting in failure. The installed gap should be fine-tuned in small increments and then recheck Free Play Gain. Refer to the table below to set the proper installed gap based on your Free Play Gain.



Symptom	Reason	Solution
<ul style="list-style-type: none"> • Too much Free Play Gain: Clutch lever moves in too far • Clutch has excessive drag or stalls • It is difficult to fully override the clutch with the lever 	Installed gap is too small	<p>Tighten the cable; increase the length of the in-line cable adjuster housing and/or the lever perch adjuster (extend the adjusters) until the correct amount of Free Play Gain is achieved.</p> <p>Recheck Free Play Gain.</p>
<ul style="list-style-type: none"> • Too little Free Play Gain: Clutch lever only moves slightly or does not move at all • Clutch slips • Vehicle seems to lose power 	Installed gap is too large	<p>Reduce the length of the cable housing (collapse the adjusters) until the correct amount of freeplay gain is achieved.</p> <p>Recheck Free Play Gain.</p>

BREAK IN THE NEW CLUTCH

Once you install your new clutch, it is important to break it in. A series of roll-on starts are used to break in the clutch. Follow these procedures for breaking in your clutch and any time new friction disks, EXP bases, Teflon pads, or wedges are installed.

⚠ WARNING

Failure to follow the break-in procedure and oil screen inspection process could cause motor oil delivery failure, which can result in motor failure, serious injury, or death.

Break-in Procedure	Number of times
1. Warm up the vehicle for 2-3 minutes. With the vehicle in NEUTRAL and your hand off of the clutch lever, rev the engine 10 times, being sure to let it return to idle between each rev cycle.	
2. With the engine still running, pull in the clutch lever, then shift the vehicle into 1 st gear. Slowly release the clutch lever. The vehicle should stay running and in place or have a slight amount of forward creep.	
3. With the vehicle idling in first gear, slowly apply throttle to begin moving.	 15 roll-on starts
4. Without using the clutch lever, accelerate moderately to approximately 3,500 RPM to fully lock up the clutch and come to a complete stop. Repeat 15 times.	

Note: *If the engine wants to stall or the creep is excessive, the idle may be too high or the installed gap may be too small. Make necessary adjustments before proceeding.*

5. Place the vehicle in **NEUTRAL** and recheck Free Play Gain. Continue to adjust the installed gap until the clutch lever is 1/8"-1/4" (3 mm-6 mm).



Recheck Free Play Gain and adjust the installed gap

Note: *Your clutch pack will expand with heat, so final adjustment to Free Play Gain should be made when the vehicle is warm. Remember not to ride without sufficient Free Play Gain.*

⚠ CAUTION

Do not perform 2nd and 3rd gear starts with this product. Always keep the motorcycle in first gear when taking off from a stop. Taking off from a higher gear can cause premature clutch wear and damage the product.

DO NOT DYNO TEST YOUR MOTORCYCLE BEFORE BREAK IN! Always break in the product before performing dyno testing. Read the included dynamometer sheet for more information.

EXP TUNING OPTIONS

Adjusting the engine idle speed to match your engagement setting is important and greatly affects the overall feel of how the EXP disk engages.

You can tune the engagement RPM of the EXP disk by changing the spring configuration. The EXP disk comes set with the recommended “**Medium**” setting from Rekluse. **For other EXP tuning options, see the Setup sheet at the back of the Installation Manual.**

To prevent freewheeling and maximize engine braking, set the idle so there is a slight amount of drag while the vehicle is idling in gear and warmed up. The idle should not be so high as to move the vehicle forward in gear with the throttle closed.

With correct Free Play Gain and the vehicle in gear, the vehicle should move forward under slight opening of the throttle. If not, one of the following symptoms is likely:


- **HIGH IDLE:** The vehicle moves forward with the throttle fully closed. Solution: reduce idle RPM.
- **LOW IDLE:** The vehicle moves forward after engine RPM becomes noticeably higher than idle RPM. Solution: increase idle RPM.

Changing the EXP springs


Use the following steps to change the EXP spring configuration. It is **NOT necessary** to disassemble the EXP halves to change springs!

1. Using a flat-blade screwdriver, push the ¼ turn pin in far enough to clear the opposite side of the EXP to unlock the pin.

2. With the pin still pushed past the base, turn 90° to remove the pin and spring.

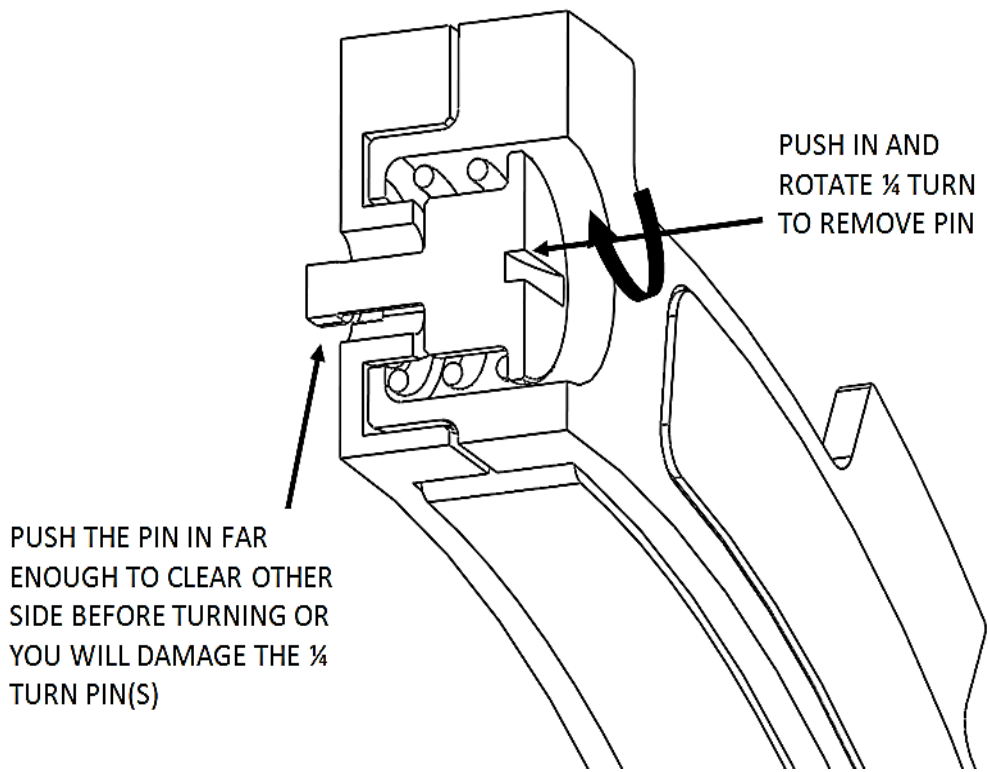

3. Remove the remaining 2 pins and springs from the same side of the EXP base.
4. Drop a new spring into the spring slot on the base, then add the ¼ turn pin.


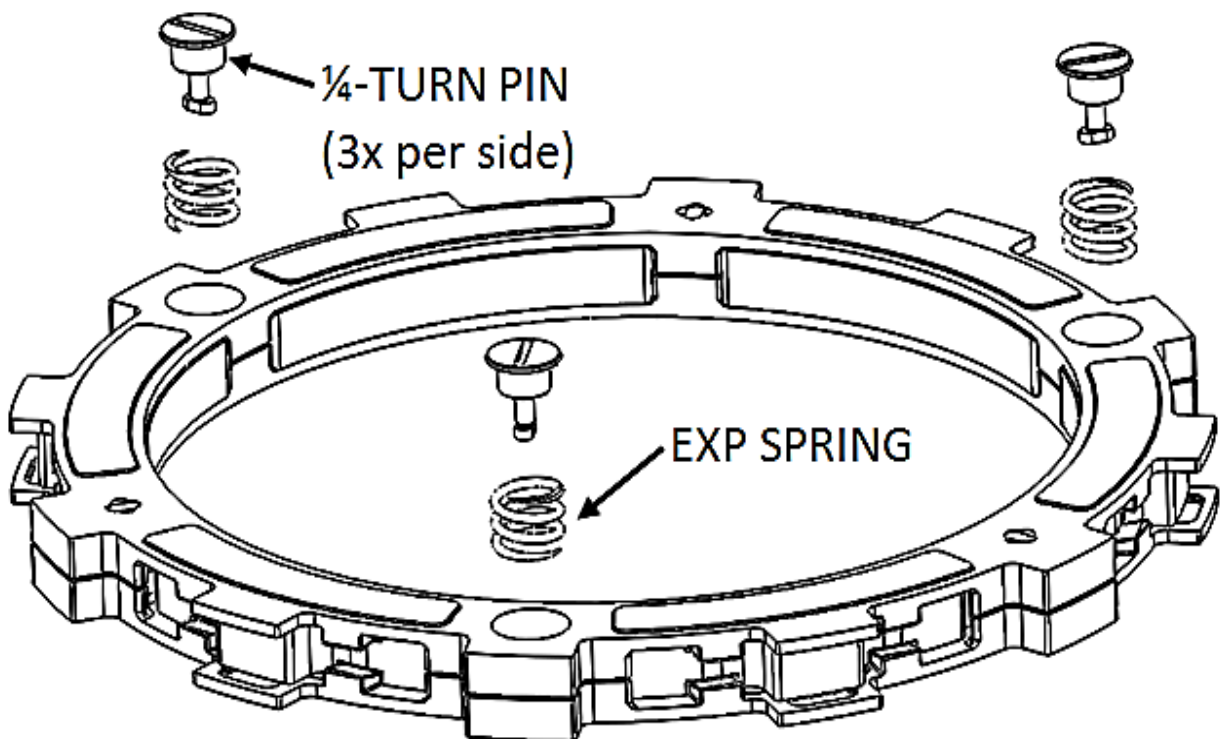


Note: To maintain even pressure, when using two different color spring sets, install one set of 3 on one side of the EXP and the remaining set of 3 on the other side.

5. Push the ¼ turn pin in far enough to clear the base, then turn 90° and release the pin. The pin should sit almost flush with the EXP base.
6. Flip the EXP friction disk over, and repeat on the other side depending on engagement preference.
7. If you need to disassemble the EXP disk, you can watch the video on our website under Tech Tips at www.rekluse.com/support/videos/atv-mc-support-videos.
8. If you need to disassemble the EXP disk, you can watch the video on our website under Tech Tips at www.rekluse.com/support/videos.

⚠ CAUTION

If you disassemble the EXP, the Teflon pads may fall out or be stuck to the ramp surfaces of the EXP bases. Take care to ensure all pads are correctly placed into wedge pockets using gentle pressure to avoid damage to the pad surfaces before reassembling the EXP. Properly seated pads will be secured in place once the EXP is reassembled. Operating the clutch without the pads in place will cause part damage or failure.

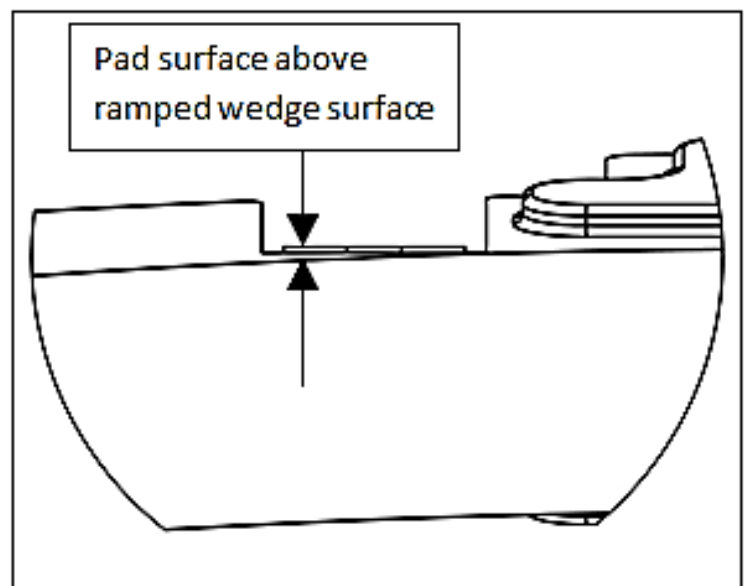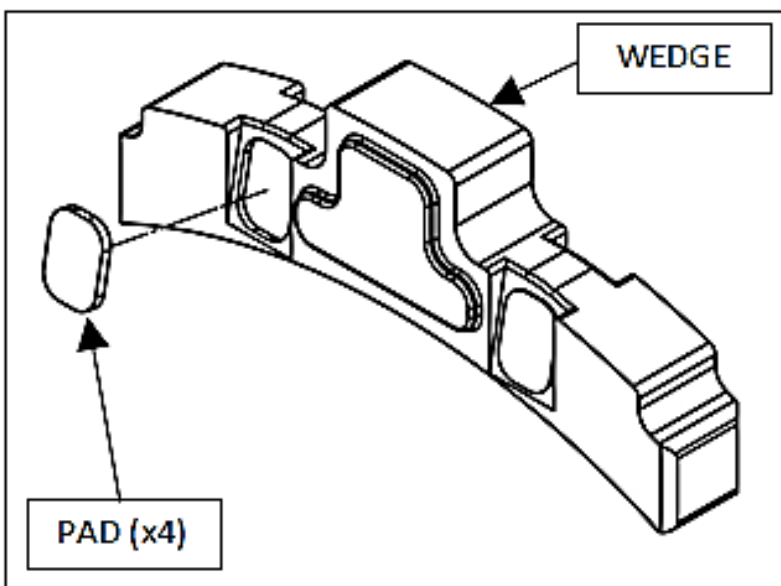

SHIFTING AND OPERATION

- Always use proper gear selection for the speed and situation whether accelerating or slowing down.
- When accelerating from a stop it is best to start in 1st gear to prevent excessive slipping of the clutch. Starting in too tall a gear repeatedly will prematurely wear out the clutch resulting in failure.

MAINTENANCE

To keep your clutch performing at its best, perform regular maintenance on your clutch.

- Keep up with regular oil changes according to the manufacturer's recommendations. Clutch performance and longevity depend on oil quality. Tired, dirty, or worn oil may cause excessive clutch drag or noise.
- For optimal clutch performance Rekluse recommends using fresh, clean oil that **meets JASO-MA** oil rating requirements. Rekluse offers Factory Formulated Oil™ developed specifically for Rekluse products. Rekluse Factory Formulated Oil is a perfect complement to any OEM or aftermarket wet clutch. Visit www.rekluse.com to learn more. Inspect all of your clutch parts for signs of wear or excessive heat, and replace components as necessary. This includes your basket sleeves. Clutch wear is dependent on the riders use.
- Measuring the friction disks for wear. This can help determine if the components need replacing.
 - Rekluse thin friction disk minimum allowable thickness = **0.068" (1.7 mm)**
- Replace friction disks if they measure below specifications or if the disks are glazed and/or burnt.
- Repeat the break-in procedure anytime you replace the frictions disks. Always soak friction disks in oil for at least 5 minutes before installing.
- Replace the drive plates if they show signs of excessive heat.

Disk inspection examples

When inspecting the clutch pack, the following pictures can be used as a reference. **These are best viewed in color by viewing this install document on www.rekluse.com/support.**

Drive Plates – If the clutch pack is getting high amounts of heat, purple, blue, or black color can be seen on the drive plate teeth. See pictures below. Not all drive plates look the same and may look different than pictured.



Normal Heat

High Heat
(Blue)

Excessive Heat
(Black)

Friction Disks – Due to the dark color of the friction material, the friction disks will appear almost black as soon as they are put in oil. During inspection, look for glazing of the friction material. Glazing will appear shiny and feel like glass, even after oil is cleaned from the friction disk. Not all friction disks look the same and may look different than pictured.



Normal Friction



Glazed Friction

TROUBLESHOOTING

Clutch Drag:

- *Cold Drag Only* – Cold drag is normal. The clutch will usually have some amount of drag before the oil warms to operating temperature. Be sure to warm up the vehicle before riding.
- *Hot and Cold Drag* – Change oil. Check for warped or non-flat drive plates in the clutch pack.

Clutch Slip:

If clutch slip occurs, inspect the clutch for signs of wear or heat.

NEED ADDITIONAL HELP?

Website

www.rekluse.com/support

Frequently Asked Questions

www.rekluse.com/faq

Support Videos

www.rekluse.com/support/videos

Phone

(208) 426-0659

Technical Support

Contact Technical Support for questions related to product installation, tuning, and performance.

Technical Support hours:

Monday thru Friday: 8:00 a.m. - 5:00 p.m.

Mountain Time zone

Email: tech@rekluse.com

Customer Service

Contact Customer Service for additional product information, orders, and returns.

Customer Service hours:


Monday thru Friday: 8:00 a.m. - 5:00 p.m.

Mountain Time zone

Email: customerservice@rekluse.com



SETUP SHEET 198-6307080

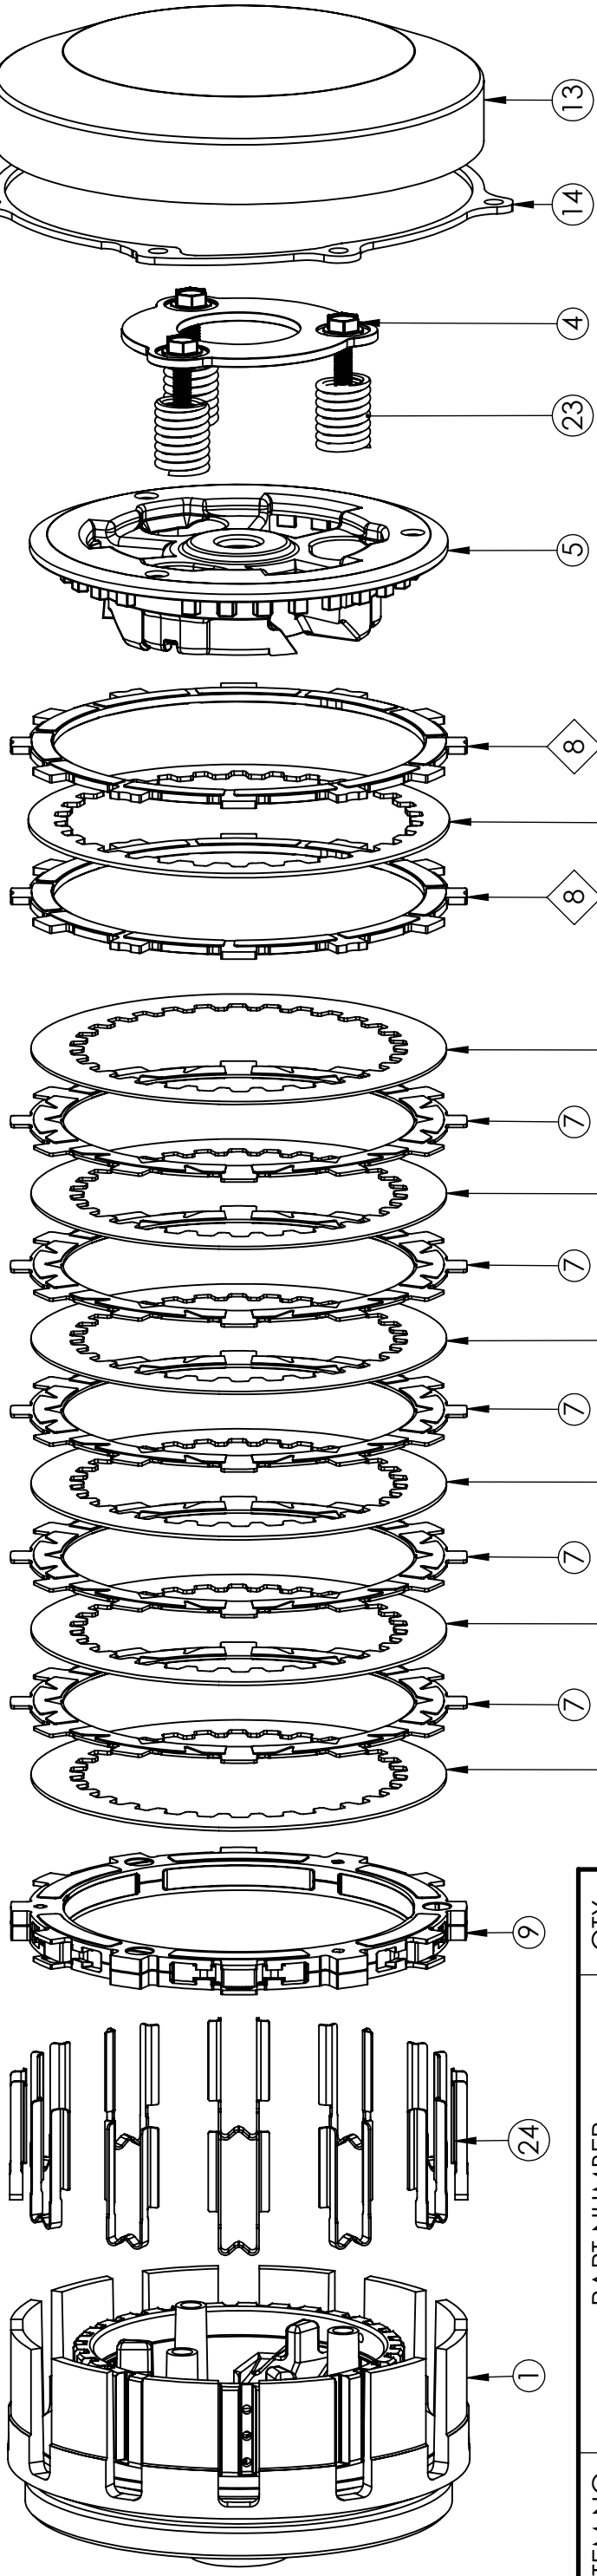



ITEM NO.	PART NUMBER	QTY.
1	OEM CLUTCH HUB AND BASKET	1
4	STOCK SPRING BOLTS	3
5	STOCK PRESSURE PLATE	1
7	THIN FRICTION DISK - TORQ-DRIVE	5
8	THICK FRICTION DISK - TORQ-DRIVE	2
9	EXP ASSEMBLY	1
0.040	.040" THICK DRIVE PLATE	3
0.048	0.048" THICK DRIVE PLATE	3
0.060	0.060" THICK DRIVE PLATE	1
13	OEM CLUTCH COVER	1
14	REKLUSE CLUTCH COVER GASKET	1
24	BASKET SLEEVES	12
23	REKLUSE SPRINGS	3

EXP TUNING OPTIONS

ENGAGEMENT RPM SETTING	SPRING CONFIGURATION
LOW	6 RED
MEDIUM *	3 RED & 3 BLUE
HIGH	6 BLUE

* MEDIUM SETTING IS PREINSTALLED IN THE EXP DISK

CLUTCH PACK SPECS & SERVICE LIMITS

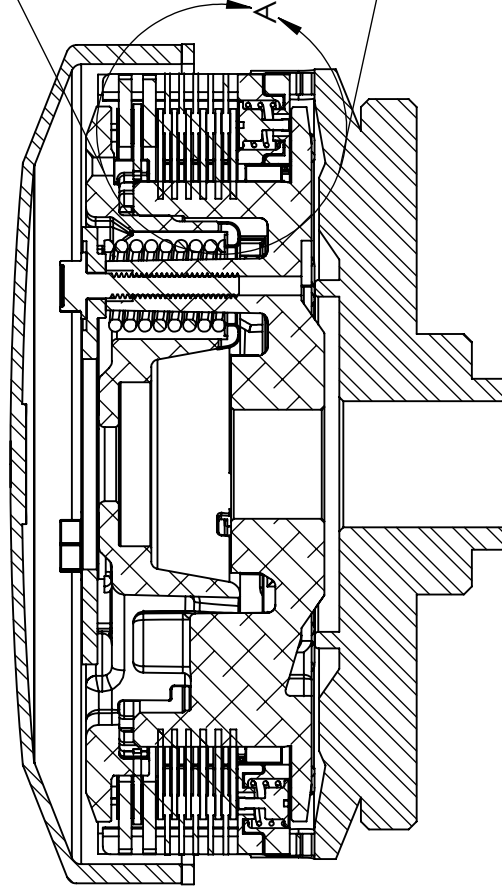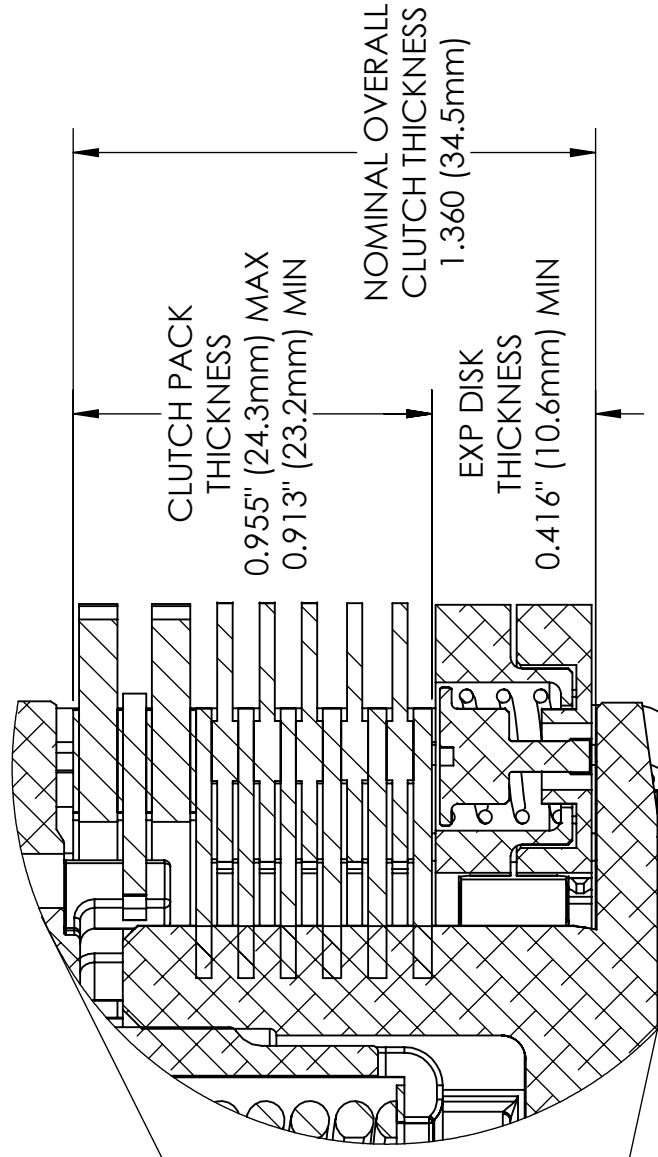

DETAIL A
SCALE 2:1